


## J-Z Insulated Jumper Wires

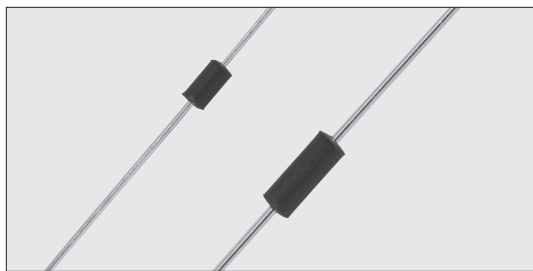


Body color : Black  
No marking

### Features

- Automatic insertion is applicable.
- Higher than Z series in allowable current.
- Products meet EU-RoHS requirements.

### Construction

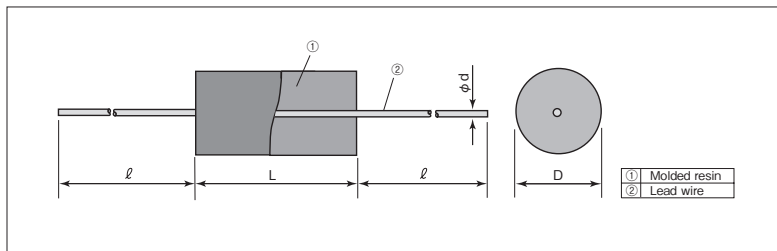

### Dimensions

Type	Dimensions (mm)				Weight (g/1000pcs)
	L	D	d (nominal)	ℓ ±3 <sup>※1</sup>	
J1/6Z	3.4 <sup>+0.1</sup> <sub>-0.2</sub>	1.7±0.2	0.5	30	110
J1/4Z	6.5±0.5	2.3 <sup>+0</sup> <sub>-0.3</sub>	0.6		190


※1 Lead length changes depending on taping and forming type.

### Ratings

Type	Max. Allowable Current	Rated Ambient Temp.	Operating Temp. Range
J1/6ZC	8A	+70°C	-55°C~+125°C
J1/4ZC	10A		

### Type Designation

Example

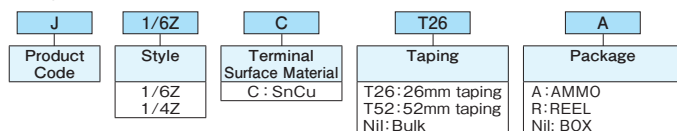

Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.

For further information on taping, please refer to APPENDIX C on the back pages.


### Taping

Taping Type Name	Taping & Q'ty (pcs)	
	AMMO	Reel
J1/6ZCT26A	2,000	—
J1/6ZCT52□	2,000	5,000
J1/4ZCT26A	2,000	—
J1/4ZCT52□	2,000	5,000

The code for package enters □.


Low Power Type Resistors

## JL Jumper Wires

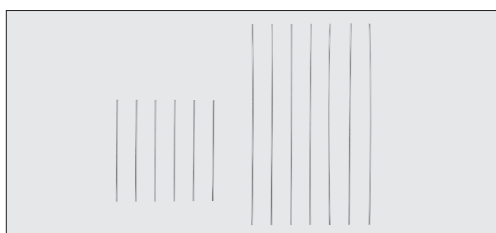

Coating : None

### Dimensions (mm)



Type	Dimension (mm)			
	W	P	A	Z
T26	26 <sup>+1.0</sup> <sub>-0</sub>	5.00±0.3	39±1.0	
T52	52±1	5.08±0.38	64.5±1.0	
	d (Nominal)	T	t	Z
T26	0.5, 0.6	6.2±0.5	2.5 Max.	0.8 Max.
T52				

### Features


- Automatic insertion is applicable.
- Products meet EU-RoHS requirements.

### Ratings

Type	Nominal Diameter	Max. Allowable Current	Rated Ambient Temp.	Operating Temp. Range
JL5C	0.5mm	8A	+70°C	-55°C~+125°C
JL6C	0.6mm	10A		

### Type Designation

Example

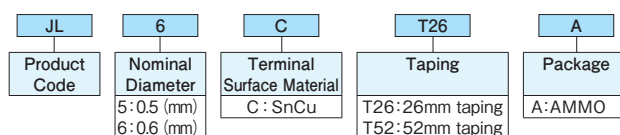

Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.

For further information on taping, please refer to APPENDIX C on the back pages.